


# AAA TECHNOLOGY & SPECIALTIES CO., INC.

**FIG. 310  
PIPE CLAMP FOR SWAY STRUT ASSEMBLIES**

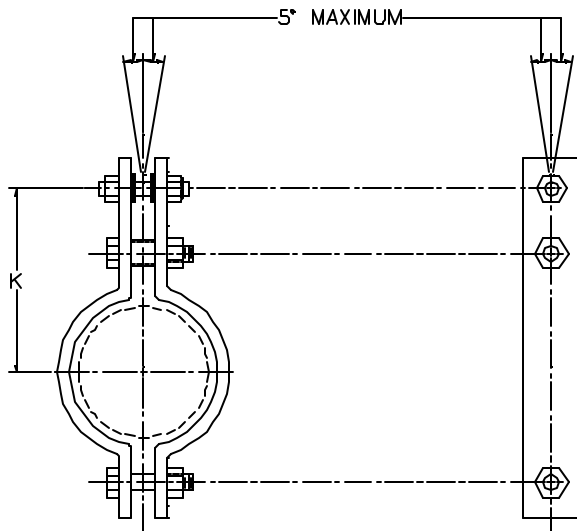

**APPLICATION:** These pipe clamps are for use with Sway Strut Assemblies Figs. 300, 301, and 305.

**FEATURES:**

- Maximum design temperature is 650 °F
- Design angle maximum is 5 °

**SELECTING THE CORRECT SWAY STRUT CLAMP:**

Once the sway strut assembly has been properly sized and select, the clamp can be easily specified by stating the figure number of the clamp followed by a dash and the sway strut size (1-10). that has a tension load rating equal to or slightly larger than the design tension load.

**CONSTRUCTION:** A-36 Carbon Steel, Special materials available on request.

**FINISHES AVAILABLE:** Carbon Steel - Black, Painted or Hot Dip Galvanized

**ORDERING:** Specify name (Pipe Clamp for Sway Strut Assembly), Fig. 310 - sway strut size (0 thru 11), pipe diameter, material, if other than carbon steel, and finish.

**EXAMPLE:** Pipe Clamp for Sway Strut Assembly, Fig. 310 - 5, 6" Pipe Dia., HDG.

Dimensions are given in inches.

NOM. PIPE DIA.	CLAMP TAKE OUT DIMENSION "K" FOR SWAY STRUT ASSEMBLY FIGS. 300, 301, & 305										
	SPECIFY PART NUMBER FIG. 310 - FOLLOWED BY THE SWAY STRUT SIZE										
	1	2	3	4	5	6	7	8	9	10	11
3/4	5 1/8										
1	5 1/4										
1 1/4	5 1/2										
1 1/2	5 1/2										
2	6 1/4	6	7								
2 1/2	6 1/4	6 1/2	7								
3	6 1/4	6 1/2	7	7	7 1/8	7 5/8					
3 1/2	6 1/2	6 3/4	7 1/4	7 1/4	7 3/8	7 7/8					
4	6 3/4	7	7 1/2	8	8 1/2	8 1/2					
5	7 3/8	7 5/8	8 1/8	8 5/8	9 1/8	9 1/8					
6	7 7/8	8 1/8	8 5/8	9 1/8	8 7/8	10 1/2	10 1/2	10 3/4			
8	8 7/8	9 1/8	9 5/8	10 1/8	9 7/8	11 1/2	12 1/4	12	13		
10	9 7/8	10 1/8	10 5/8	11 1/8	10 7/8	12 1/2	13 1/4	13 1/4	14 1/4	16 1/4	
12	10 7/8	11 1/8	11 5/8	12 1/2	12 5/8	13 1/2	14 1/4	14 1/4	15 1/2	17 1/4	
14	11 1/2	11 3/4	12 1/4	12 3/4	13 1/4	14 1/4	14 3/4	15	16 1/4	18	
16	12 1/2	12 3/4	13 1/4	13 3/4	14 1/4	15 3/4	15 3/4	16 1/2	17 1/4	19 1/4	
18	13 1/2	13 3/4	14 1/4	15	15 1/4	16 3/4	16 3/4	17 1/2	18 1/2	20 1/4	
20	14 1/2	14 3/4	15 1/4	16	16 1/4	17 3/4	18 1/4	18 1/2	20	21 1/2	25
24	16 1/2	16 3/4	17 1/4	18	18 1/4	20 1/4	20 3/4	21 1/4	22	23 3/4	26 1/8
30				21 3/4	22	23 3/4	23 3/4	24 1/4	25 1/4	26 3/4	29 1/4
36				24 3/4	25	26 3/4	27	27 1/4	28 3/4	30	33
40											34 1/2