


AAA TECHNOLOGY & SPECIALTIES CO., INC.

FIG. 325
PIPE CLAMP FOR SWAY STRUT
ASSEMBLY FIGS. 315 & 320

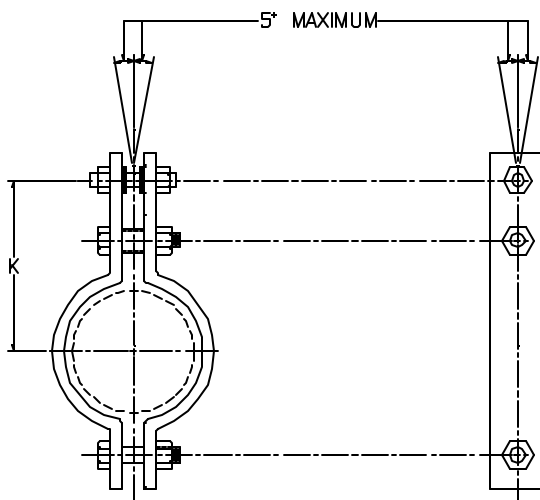

APPLICATION: These pipe clamps are for use with Sway Strut Assemblies Figs. 315 and 320.

FEATURES:

- Maximum design temperature is 650 °F
- Design angle maximum is 5 °

SELECTING THE CORRECT SWAY STRUT CLAMP:

Once the sway strut assembly has been properly sized and select, the clamp can be easily specified by stating the figure number of the clamp followed by a dash and the sway strut size (1-10). that has a tension load rating equal to or slightly larger than the design tension load.

CONSTRUCTION: A-36 Carbon Steel, Special materials available on request.

FINISHES AVAILABLE: Carbon Steel Black, Painted or Hot Dip Galvanized.

ORDERING: Specify name (Pipe Clamp for Sway Strut Assembly), Fig. 325 - sway strut size (A, B, C, or 1-8), pipe diameter, material, if other than carbon steel, and finish.

EXAMPLE: Pipe Clamp for Sway Strut Assembly, Fig. 325 - 5, 6" Pipe Dia., HDG.

Dimensions are given in inches.

NOM. PIPE DIA. (IN)	CLAMP TAKE OUT DIMENSION "K" FOR SWAY STRUT ASSEMBLIES 315 & 320							
	SPECIFY PART NUMBER 325- FOLLOWED BY THE SWAY STRUT SIZE							
	A	B & C	1 & 2	3 & 4	5	6	7	8
3/4	2 7/16							
1	2 9/16							
1 1/4	2 11/16							
1 1/2	4 1/8							
2	5 1/8	6 3/8	6 3/8					
2 1/2	5 3/8	7	7	8 1/8				
3	5 15/16	7	7	8 1/8				
3 1/2	6 3/16	7	7	8 1/8	10			
4	6 1/2	7 1/4	7 1/4	8 3/8	10			
5	7 3/4	7 3/4	7 3/4	9 1/8	10			
6	8 3/8	8 3/8	8 3/8	10	10	11 7/8		
8	9 3/8	9 3/8	9 3/8	11 1/4	11 1/4	12 5/8		
10	10 1/2	10 1/2	10 1/2	12 3/4	12 3/4	14 1/4	14 1/4	16 1/4
12		11 7/8	11 7/8	13 7/8	13 7/8	15 3/8	15 3/8	17 1/4
14		12 5/8	12 5/8	14 1/2	14 1/2	16	16 1/4	18
16		13 5/8	13 5/8	15 1/4	15 1/4	17 1/8	17 1/2	19
18		14 5/8	14 5/8	16 3/8	16 3/8	18 1/4	18 1/2	20 1/4
20		15 3/4	15 3/4	17 3/4	17 3/4	19 1/4	19 3/4	21 1/2
24		18 1/8	18 1/8	19 7/8	19 7/8	21 3/4	21 3/4	24
30		21 1/4	21 1/4	23	23	25	25	28
36		24	24	26 1/2	26 1/2	28 1/8	28 1/8	31 1/4