
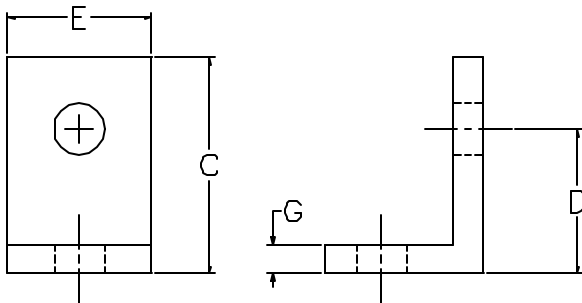


AAA TECHNOLOGY & SPECIALTIES CO., INC.

**FIG. 500
SIDE BEAM BRACKET**



APPLICATION: Side Beam Brackets are used to attach hanger rod to the side of beams, columns and joists, etc. Side Beam Brackets are attached to a support structure by bolting or welding.

CONSTRUCTION: Side Beam Brackets are cut from carbon steel angle with holes centered and punched.

FINISHES AVAILABLE: Black, Hot Dip Galvanized, Electro-Plated or Painted.

ORDERING: Specify figure number, rod diameter, name and finish, if other than black.

EXAMPLE: Fig. 500, 5/8", Side Beam Bracket, HDG.

SIZE	MAX. LOAD, LBS.		FOR PIPE SIZES	A	B	C	D	E	G	HOLES	WT. PER 100
	Log Screw	Bolt to Steel									
3/8	390	580	3/4 to 2	7/8	1 3/8	1 7/8	1 1/4	1 1/4	1/4	7/16	25
1/2	640	960	1/2 to 3 1/2	1 3/16	1 7/8	2 3/8	1 5/8	1 1/2	1/4	9/16	40
5/8	760	1500	4 to 5	1 7/16	2 1/4	2 7/8	1 7/8	1 1/2	3/8	11/16	70
3/4	830	2500	6	1 11/16	2 1/2	3 1/4	2 1/8	2	3/8	13/16	107
7/8	830	3600	8 to 12	2	3	3 3/4	2 1/2	2	1/2	15/16	164